
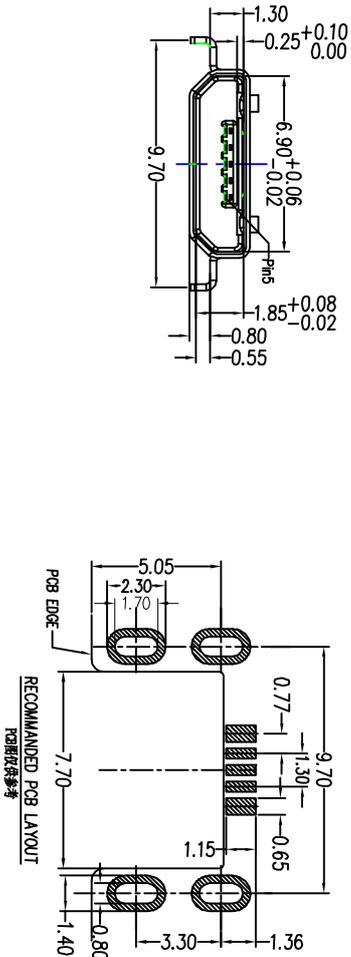


REV.	EQN NO	OR DESCRIPTION	REVISED	DATE
A		REVISE NOTE	JACK	4/9-09*

Note:

1. Specification:

- 1.1 Current rating: 1.5PIN 3A Max/2,3,4PIN 1A Max.
- 1.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 1.3 Contact resistance: 30 m Ω Max.
- 1.4 Insulation resistance: 100 M Ω Min.
- 1.5 Total mating force: 3.57 Kgf Max.
- 1.6 Total unmating force: 1.0 Kgf Min.
- 1.7 Temperature range: -30°C~80°C

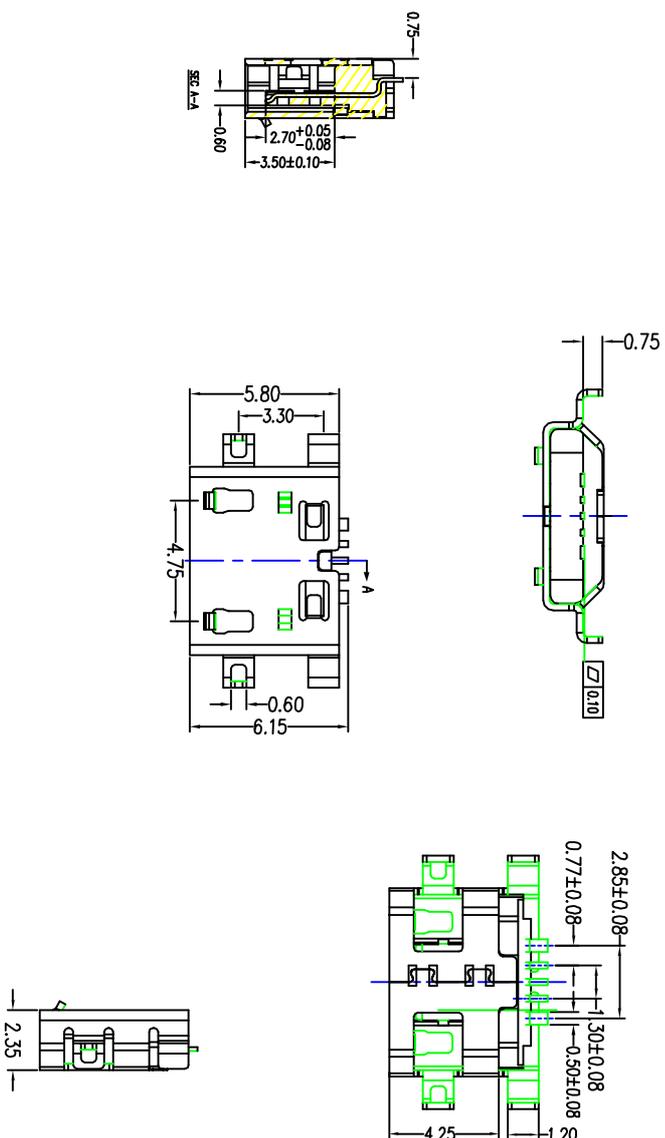

C	SHELL	1	SUS.T=0.25mm	NSOU"
B	CONTACT	5	COPPER ALLOY,T=0.25mm 1U" Au	
A	HOUSING	1	High temperature with g.f.U194V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
3G ENTERPRISE LIMITED				

DECIMALS:	ANGLES:	TITLE	MICRO USB SPIN B TYPE SMF (双卡点1.5PIN 加宽)
X : ±0.15	X : ±1°	DWN	JACK PART NO. 2UB2006-B0010B
X.X : ±0.10		CHKD	SCALE: UNIT: mm
X.XX : ±0.05		APVD	SIZE: A3 SHEET: 10F 1 REV: A

CUSTOMER COPY