
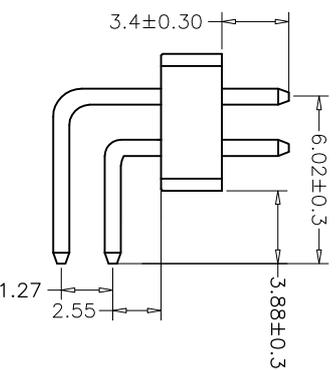
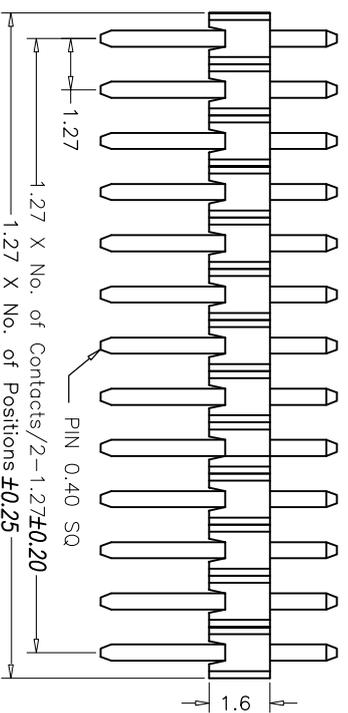


# 1.27mm Pin Header, Dual Row, Straight/Right Angle

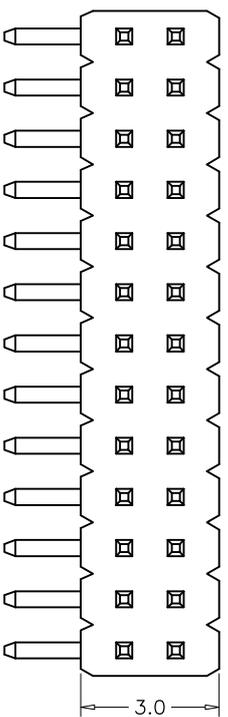


**SPECIFICATIONS**  
 Current Rating : 1AMP  
 Operation Temperature: -40°C to +105°C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V

PART NO: 2PH-1630-D□□

表示PIN脚排2-50

## PCB LAYOUT

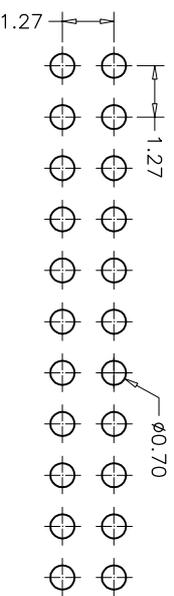

REV.	EGN NO	OR DESCRIPTION	REVISED	DATE

B	CONTACT	4-100	BROSS	Au or Sn Over 50μr Ni
A	HOUSING	1	Polyester(U.L.94V-0) Standard:Nylon-6T	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
3G ENTERPRISE LIMITED				
DECIMALS: ANGLES:				
X	:±0.35	TITLE	PH. 27*1.6 双排 3.8(2.35)/3.4/ 90度	
.X	:±0.25	DWN	JACK	PART NO: 2PH-1630-D□□
.XX	:±0.20	CHKD	SCALE:	UNIT: mm
.XXX	:±0.15	APVD	SIZE: A3	SHEET: 1OF 1 REV: A
CUSTOMER COPY				