



2.54mm Pin Header, Single Row Straight

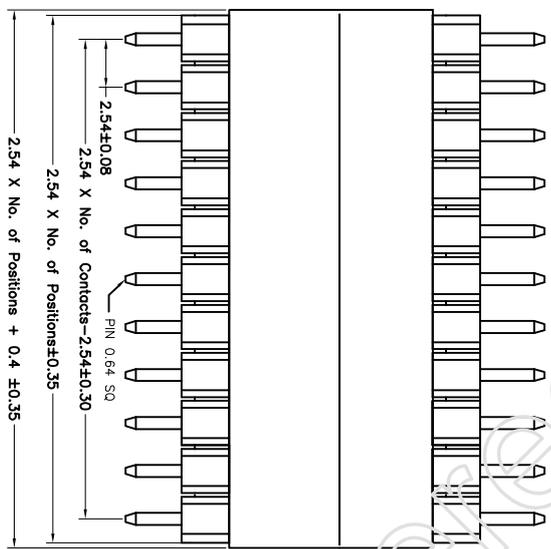

SPECIFICATIONS
 Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 1000V

2	CONTACT	2-40	Brass	Au or Sn over 50u" Ni
1	HEUSING	1	PBT Polyester (UL94V-0)	BLACK
UNLESS OTHERWISE SPECIFIED TOLERANCES		QTY	MATERIAL	PLATING & COLOR
3G ENTERPRISE LIMITED				
DECIMALS: ANGLES:		TITLE	PH2.54 单排四塑 L=24.0/3.0/3.0 180度	
X	: ±0.50	DWG	JACK	PART NO. 2PH-2518-000
X X	: ±0.35	CHKD	SCALE: 4/1	UNIT: mm
X.XX	: ±0.20	APVD	SIZE: A3	SHEET: 1 OF 1 REV: A
X.XXX	: 0.10	CUSTOMER COPY		