
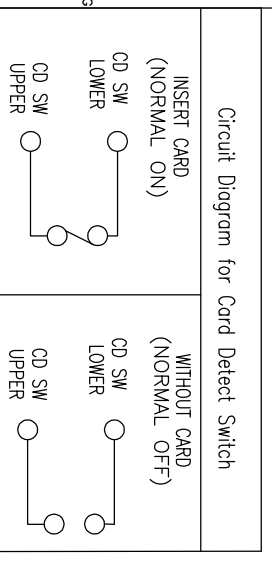
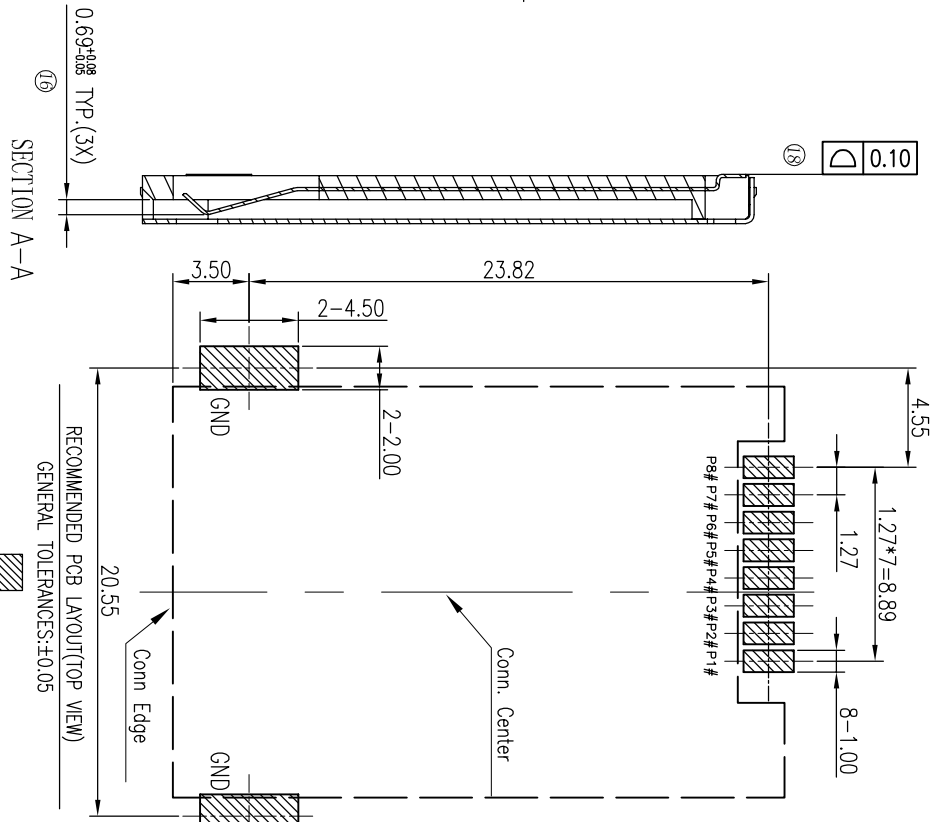


REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2015/11/02



Specification

- \* Electrical Characteristics :
  - Current Rating: 0.5A AC/DC Max.
  - Dielectric Withstanding Voltage: 250V AC/DC
  - Insulation Resistance: 500M ohms Min.
  - Contact Resistance: 100m ohms Max.
- \* Mechanical Characteristics:
  - Mating Cycles: 5000 Insertions.
- \* Environmental :
  - Operating Temperature: -40°C to +85°C.
- \* Material:
  - 1. Housing: HI-Temp plastic UL 94V-0 Rated.
  - 2. Contact: Copper Alloy.
  - 3. Shell: Stainless Steel SUS 301, t=0.20mm.
- \* Plating :
  - Terminal:
    - Contact area: G/F Plated Over 30u" Nickel.
    - Solder area: 80u" Tin Plated Over 30u" Nickel.
    - Under plate: 30u" Min. Nickel.
  - Shell:
    - 30u" Min. Nickel Plated Over All,
    - Solder Area: Gold Flash.

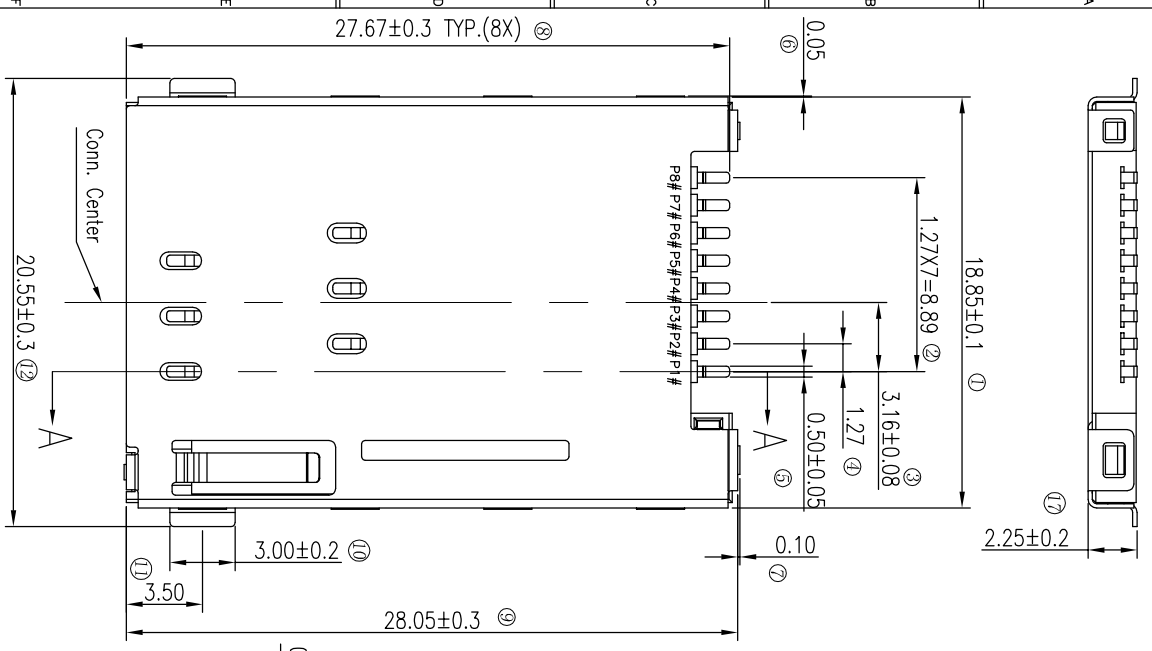

PIN NO.	DESCRIPTION
P1#	C1:VCC
P2#	C5:GND
P3#	C2:RST
P4#	C6:VPP
P5#	C3:CLK
P6#	C7:I/O
P7#	CD SW LOWER
P8#	CD SW UPPER

GENERAL TOLERANCE	DWG NO.	TITLE
X:±0.25	X:±5°	
X±0.20	X:±2°	
.XX±0.15	.XX'±1'	
.XXX±0.08	.xxx'±0.5'	

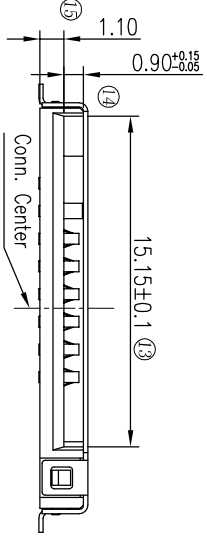

GENERAL TOLERANCE	DWG NO.	JYSA1102-001	APPD:	spring	Scale	1:1
X:±0.25	X:±5°					
X±0.20	X:±2°					
.XX±0.15	.XX'±1'					
.XXX±0.08	.xxx'±0.5'					

SIM CARD PUSH (6+2PIN)  
H=2.2mm 无推

DR: \_\_\_\_\_  
Date: 2015/11/02

JYS 杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.