

P.C.B LAYOUT


REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2012/04/13

ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING : 1.5AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE : AC 500V R.M.S.
 INSULATION RESISTANCE : 1000 MEGOHMS MINIMUM AT DC 500V.
 CONTACT RESISTANCE : 30 MILLIOMH MAXIMUM.
 OPERATING TEMPERATURE : -55° TO+105° .

MECHANICAL CHARACTERISTICS:
 CONTACT INSERTION FORCE :3.57KG MAXIMUM.
 CONTACT SEPARATION FORCE : 1.0KG MINIMUM.

MATERIALS:
 HOUSING: PBT+30% G/F, UL94V-0, BLACK.
 CONTACT :BRASS 2680R-H, T=0.25±0.015mm.
 SHELL: SPCC BRASS 2680R-H, T=0.30±0.01mm;

CONTACTS:GOLD FLASHED 1U", 30", 5U", 10U", 15U", 30U",
 END OF NI-50U"MIN
 SHELL: NICKEL PLATED OVER 30"100U" MIN.

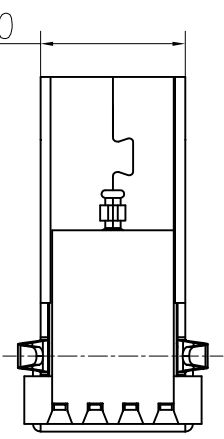

GENERAL TOLERANCE		DWG NO.	JYSA0804-001	APPD:	WIND	Scale	1:1
X±0.45	X±.5	Title	USB A/F 侧插短体(无卷边(0型脚)加强筋	CHKD:		UNIT	mm
X±0.35	X±.2			DR:			
.XX±0.25	.XX±.1	Part NO.	JYS-USB140-028	Date	2012/04/13		
.XXX±0.15	.xxx±0.5						
SHEET	1/1	杰宇森电子有限公司 JIE YU SEN ELECTRONIC CO., LTD.					