

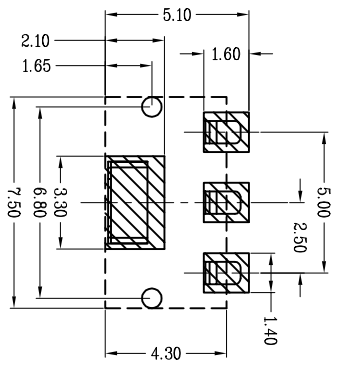

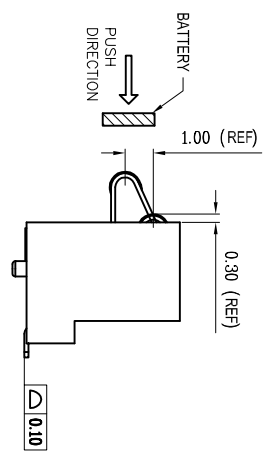




REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31



RECOMMENDED PCB LAYOUT  
TOLERANCE: ±0.05



- NOTES:
- ELECTRICAL PERFORMANCES:
    - RATING CURRENT: 2A
    - RATING VOLTAGE: 100VAC
    - CONTACT RESISTANCE: 50 Ω
    - INSULATION RESISTANCE: 1000 ΩM
    - DELECTRIC WITHSTANDING VOLTAGE: 500VAC FOR 1 MINUTE
  - MECHANICAL PERFORMANCE:
    - DURABILITY: 5000TIMES
    - NORMAL FORCE AT WORKING POSITION: 80gf Min.
    - OPERATION TEMPERATURE: -40 °C ~ +85 °C

ITEM	DESCRIPTION	QUANTITY	MATERIAL	FINISH	REMARK
③	PAD	1	STAINLESS STEEL	NI PLATING OVER ALL	
②	CONTACT	9	COPPER ALLOY	NI PLATING OVER ALL AT CONTACT AREA Ni AT SOLDER AREA	
①	HOUSING	1	THERMOPLASTIC UL149-3 COLOR:BLACK		

GENERAL TOLERANCE		DWG NO.	JYSA0405-04	APPD.	WIND	Scale	1:1
X ±0.45	X ±.5	Title	BATTERY 3PIN 2.50PITCH 5.4H 有柱&SMA款	CHKD:		UNIT	mm
X ±0.35	X ±.2	Part NO.	JYS-BV540-065	DR:		Date	2011/10/31
.XX ±0.25	.XX ±.1						
.XXX ±0.15	.xxx ±0.5						
SHEET	1/1						

JYS 杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.