
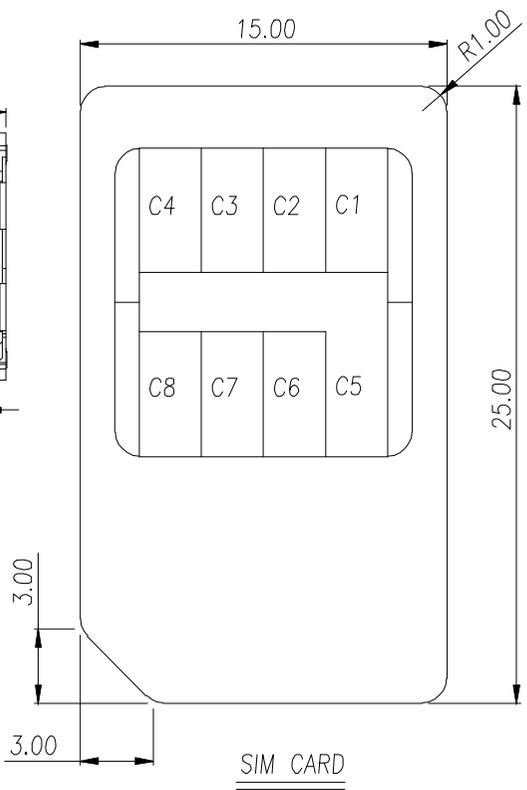





REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2011/10/31

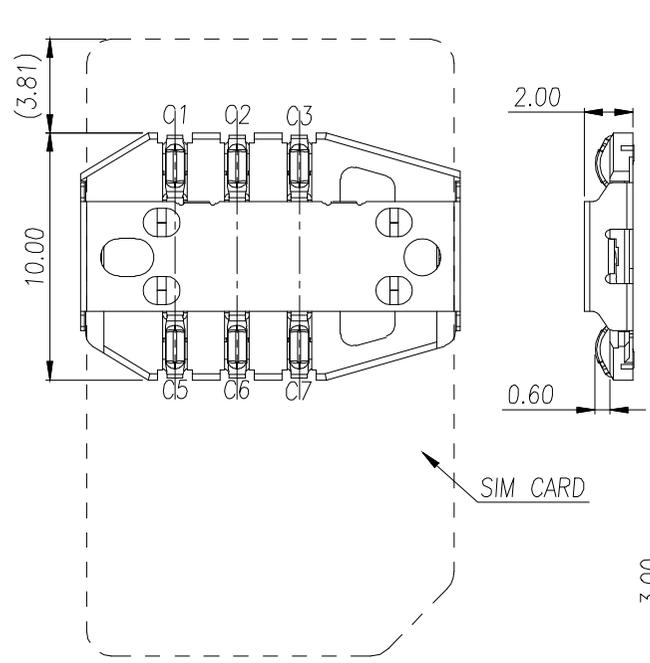

C1:VCC  
 C2:RST  
 C3:CLK  
 C4:RESERVED  
 C5:GND  
 C6:VPP  
 C7:I/O  
 C8:RESERVED

NOTES:

- MATERIAL:
  - 1-1 HOUSING:THERMOPLASTIC,UL 94V-0;COLOR:BLACK
  - 1-2 SHIELDED:STAINLESS STEEL
  - 1-3 CONTACT:COPPER ALLOY
- FINISH:
  - 2-1 CONTACT: Au PLATING ON CONTACT AREA (SEE P/N DESCRIPTION)  
50u" MIN NICKEL UNDERPLATING OVER ALL  
1u"MIN Au PLATING ON SOLD AREA,
  - 2-2 SHIELDED:50u" MIN NICKEL UNDERPLATING OVER ALL
- PRODUCT SPECIFICATIONS:
  - 3-1 VOLTAGE RATING: 50V
  - 3-2 WITHSTANDING VOLTAGE: AC250V R.M.S
  - 3-3 CURRENT RATING: 0.5A
  - 3-4 INSULATION RESISTANCE: 1000MEG.OHM MIN AT DC 250V
  - 3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX
  - 3-6 OPERATION TEMPERATURE: -20° TO +85°
  - 3-7 DURABILITY: 3000 CYCLES

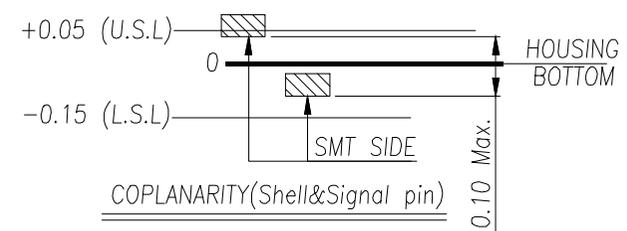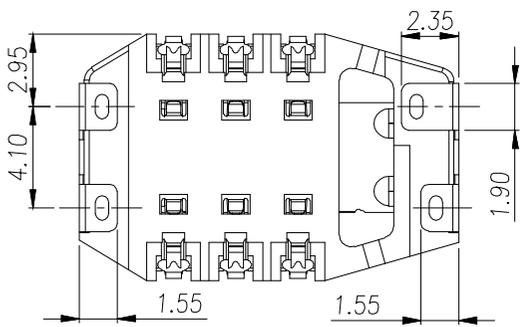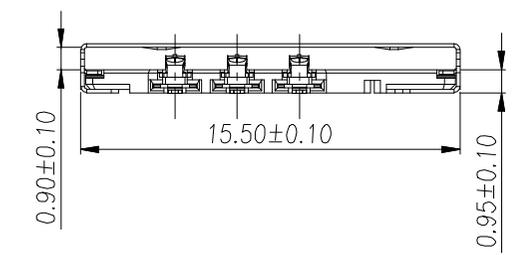

GENERAL TOLERANCE		DWG NO.	JYSA0312-001	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	2.0H菱形SIM CARD 6P 连桥式	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-SIM200-184	Date	2013/02/29		
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1			<b>JYCONN Electronics Co., LTD.</b>			