

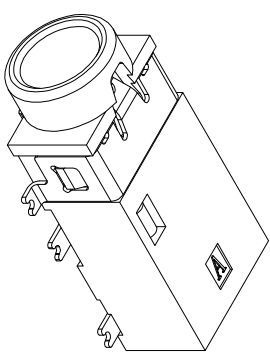
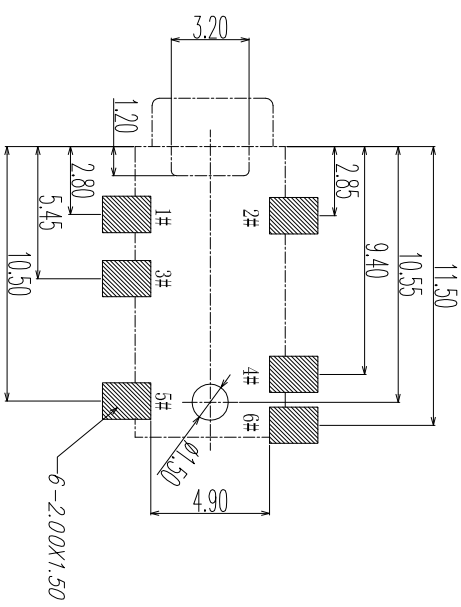
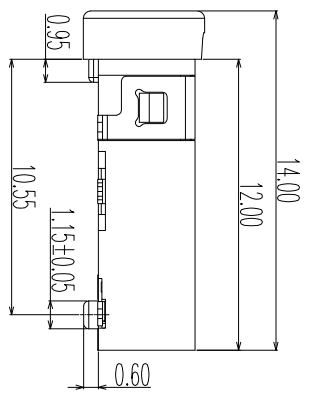



REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2011/10/31

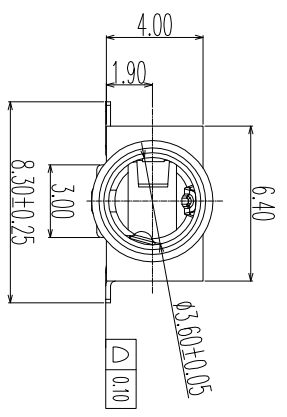




3D VIEW

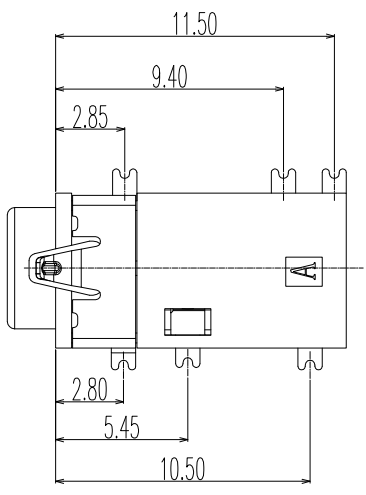

P.C.B LAYOUT  
TOP VIEW

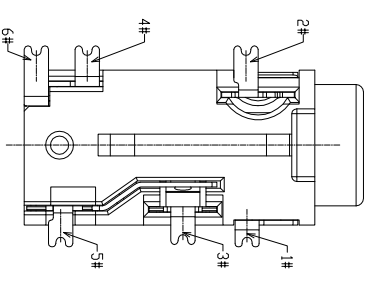

1. CONTACT CURRENT RATING: 1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 1000Ω MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES: 30N MAX.;
7. CONNECTOR UNMATING FORCES: 3N MIN.;

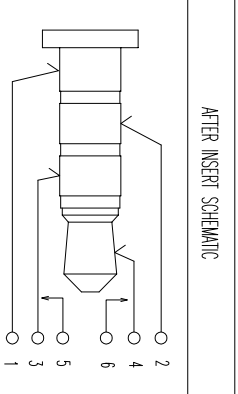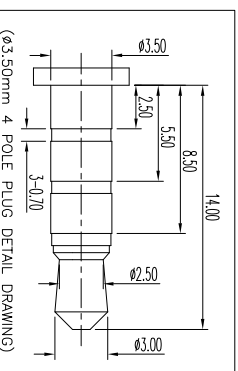

GENERAL TOLERANCE

QNC NO.	Title
X.±0.45	X.±.5*
X.±0.35	X.±.2*
.XX±0.25	.XX*±.1*
.XXX±0.15	.xxx±0.05*

Part No.	Part No.
JYS40-028-001	JYS-4K40-035

APPO.	WMO	Scale
		1:1

CHKD.	UNIT
DR	mm

Date
2012/02/29

SHEET
1/1



杰宇森电子有限公司  
JIE YU SEN ELECTRONIC CO., LTD.

ITEM	NAME	QTY	DESCRIPTION
1	HOUSING	1	PPA COLOR BLACK
2	TERMINAL 1#	1	PHOSPHOR BRONZE; THE BOTTOM OF THE NICKEL; THE WHOLE GOLD PLATING.
3	TERMINAL 2#	1	ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
4	TERMINAL 3#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
5	TERMINAL 4#	1	TERMINAL 5#
6	TERMINAL 5#	1	PHOSPHOR BRONZE; NICKEL UNDER PLATING OVERALL;GOLD PLATING ON SOLDER AREA ;GOLD PLATING ON CONTACT AREA
7	TERMINAL 6#	1	TERMINAL 6#

NOTE